







Q-Standard



Niethülse **Aluminium**
 Nietdorn **Stahl verzinkt**
 Senkkopf





DIN EN ISO 15978

$\varnothing d$	l	 min - max	 \varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	 [N]	 [N]	Code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
2.4	6.0	2.0 - 4.0	2.5 - 2.6	5.0	1.0	1.55	25	350	250	10AS42406
	8.0	4.0 - 6.0	2.5 - 2.6	5.0	1.0	1.55	25	350	250	10AS42408
	10.0	6.0 - 8.0	2.5 - 2.6	5.0	1.0	1.55	25	350	250	10AS42410
3.0	6.0	2.0 - 3.5	3.1 - 3.2	6.0	1.3	2.00	25	550	400	10AS43006
	8.0	3.5 - 5.0	3.1 - 3.2	6.0	1.3	2.00	25	550	400	10AS43008
	10.0	5.0 - 7.0	3.1 - 3.2	6.0	1.3	2.00	25	550	400	10AS43010
	12.0	7.0 - 9.0	3.1 - 3.2	6.0	1.3	2.00	25	550	400	10AS43012
	14.0	9.0 - 11.0	3.1 - 3.2	6.0	1.3	2.00	25	550	400	10AS43014
3.2	6.0	2.0 - 3.5	3.3 - 3.4	6.0	1.3	2.00	25	700	500	10AS43206
	8.0	3.5 - 5.0	3.3 - 3.4	6.0	1.3	2.00	25	700	500	10AS43208
	10.0	5.0 - 7.0	3.3 - 3.4	6.0	1.3	2.00	25	700	500	10AS43210
	12.0	7.0 - 9.0	3.3 - 3.4	6.0	1.3	2.00	25	700	500	10AS43212
	14.0	9.0 - 11.0	3.3 - 3.4	6.0	1.3	2.00	25	700	500	10AS43214
	16.0	11.0 - 13.0	3.3 - 3.4	6.0	1.3	2.00	25	700	500	10AS43216
4.0	6.0	1.5 - 2.0	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44006
	8.0	2.0 - 5.0	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44008
	10.0	5.0 - 6.5	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44010
	12.0	6.5 - 8.5	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44012
	14.0	8.0 - 10.5	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44014
	16.0	10.5 - 12.5	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44016
	18.0	12.5 - 14.5	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44018
	20.0	14.5 - 16.5	4.1 - 4.2	7.5	1.7	2.45	27	1700	1100	10AS44020



Niethülse **Aluminium**
 Nietdorn **Stahl verzinkt**
 Senkkopf

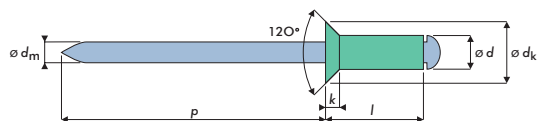

DIN EN ISO 15978

$\varnothing d$	l	min - max	\varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	[N]	[N]	Code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
4.8	6.0	1.5 - 2.5	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44806
	8.0	2.5 - 4.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44808
	10.0	4.0 - 6.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44810
	12.0	6.0 - 8.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44812
	14.0	7.0 - 9.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44814
	16.0	8.0 - 12.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44816
	18.0	11.0 - 13.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44818
	21.0	13.0 - 16.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44821
	22.0	15.0 - 17.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44822
	25.0	17.0 - 20.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44825
30.0	20.0 - 25.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44830	
35.0	25.0 - 30.0	4.9 - 5.0	9.0	2.0	2.95	27	2500	1700	10AS44835	
5.0	8.0	2.5 - 4.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45008
	10.0	4.0 - 6.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45010
	12.0	6.0 - 8.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45012
	14.0	7.0 - 9.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45014
	16.0	8.0 - 12.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45016
	18.0	11.0 - 13.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45018
	20.0	12.0 - 15.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45020
	25.0	15.0 - 20.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45025
	30.0	20.0 - 25.0	5.1 - 5.2	9.0	2.1	2.95	27	2950	1950	10AS45030