







Q-Sealed

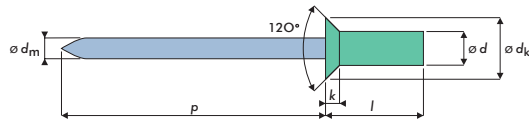

Niethülse **Aluminium**
 Nietdorn **Stahl phosphatiert**
 Senkkopf



DIN EN ISO 15974

$\varnothing d$	l	 min - max	 \varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	 [N]	 [N]	Code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	7.5	1.5 - 3.5	3.3	6.0	1.3	1.85	25	1250	1070	20AS43207
	9.0	3.5 - 4.5	3.3	6.0	1.3	1.85	25	1250	1070	20AS43209
	10.5	4.5 - 6.5	3.3	6.0	1.3	1.85	25	1250	1070	20AS43210
	12.0	6.5 - 8.0	3.3	6.0	1.3	1.85	25	1250	1070	20AS43212
	13.5	8.0 - 9.5	3.3	6.0	1.3	1.85	25	1250	1070	20AS43213
4.0	9.5	2.0 - 5.0	4.1	7.5	1.7	2.35	25	2200	1600	20AS44009
	11.0	5.0 - 6.5	4.1	7.5	1.7	2.35	25	2200	1600	20AS44011
	12.5	6.0 - 8.0	4.1	7.5	1.7	2.35	25	2200	1600	20AS44012
	14.0	8.0 - 9.5	4.1	7.5	1.7	2.35	25	2200	1600	20AS44014
4.8	9.5	2.5 - 4.5	4.9	9.5	2.0	2.77	27	3100	2200	20AS44809
	11.0	4.5 - 6.0	4.9	9.5	2.0	2.77	27	3100	2200	20AS44811
	12.5	6.0 - 7.5	4.9	9.5	2.0	2.77	27	3100	2200	20AS44812
	14.0	7.5 - 9.0	4.9	9.5	2.0	2.77	27	3100	2200	20AS44814
	15.5	9.0 - 10.5	4.9	9.5	2.0	2.77	27	3100	2200	20AS44815
	17.0	10.5 - 12.0	4.9	9.5	2.0	2.77	27	3100	2200	20AS44817
	19.0	12.0 - 14.0	4.9	9.5	2.0	2.77	27	3100	2200	20AS44819