







Q-Sealed

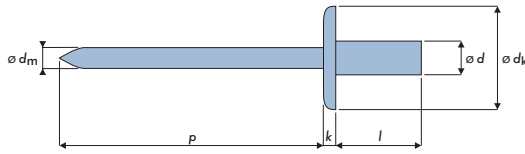

Niethülse **Stahl verzinkt**
 Nietdorn **Stahl verzinkt**
 Großkopf 9.5 | 12.0 | 14.0 mm



ÄNLICH DIN EN ISO 15976

| $\varnothing d$ | l |  min - max |  \varnothing | $\varnothing d_k$ | k max. | $\varnothing d_m$ max. | p min. |  [N] |  [N] | Code |
|-----------------|-------------|--|--|-------------------|-------------|---------------------------|-------------|--|--|------------------|
| mm | mm | mm | mm | mm | mm | mm | mm | [N] | [N] | |
| 3.2 | 6.0 | 0.5 - 1.5 | 3.3 | 9.5 | 1.3 | 1.90 | 27 | 1300 | 1150 | 20SS23206 |
| | 8.0 | 1.5 - 3.0 | 3.3 | 9.5 | 1.3 | 1.90 | 27 | 1300 | 1150 | 20SS23208 |
| | 9.5 | 3.0 - 5.0 | 3.3 | 9.5 | 1.3 | 1.90 | 27 | 1300 | 1150 | 20SS23209 |
| | 12.0 | 5.0 - 6.5 | 3.3 | 9.5 | 1.3 | 1.90 | 27 | 1300 | 1150 | 20SS23212 |
| 4.0 | 6.0 | 0.5 - 1.5 | 4.1 | 12.0 | 1.5 | 2.30 | 27 | 1550 | 1700 | 20SS24006 |
| | 8.0 | 1.5 - 3.0 | 4.1 | 12.0 | 1.5 | 2.30 | 27 | 1550 | 1700 | 20SS24008 |
| | 10.0 | 3.0 - 5.0 | 4.1 | 12.0 | 1.5 | 2.30 | 27 | 1550 | 1700 | 20SS24010 |
| | 12.0 | 5.0 - 6.5 | 4.1 | 12.0 | 1.5 | 2.30 | 27 | 1550 | 1700 | 20SS24012 |
| | 15.0 | 6.5 - 10.5 | 4.1 | 12.0 | 1.5 | 2.30 | 27 | 1550 | 1700 | 20SS24015 |
| 4.8 | 8.0 | 1.0 - 3.0 | 4.9 | 14.0 | 1.7 | 2.90 | 27 | 2800 | 2400 | 20SS24808 |
| | 9.5 | 3.0 - 4.5 | 4.9 | 14.0 | 1.7 | 2.90 | 27 | 2800 | 2400 | 20SS24809 |
| | 12.0 | 4.5 - 6.0 | 4.9 | 14.0 | 1.7 | 2.90 | 27 | 2800 | 2400 | 20SS24812 |
| | 16.0 | 6.0 - 10.5 | 4.9 | 14.0 | 1.7 | 2.90 | 27 | 2800 | 2400 | 20SS24816 |