


Q-Standard





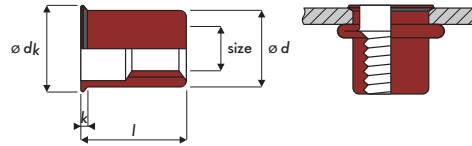

Body

Stainless Steel A4
Reduced countersunk head
Open end




Larger
grip range
on request

size	$\varnothing d$	l	 min-max	 \varnothing	$\varnothing d_k$	k min	 [Nm]	 [N]	code
	mm	mm	mm	mm	mm	mm			
M4	5.9	10.00	0.5 - 2.0	6.0 - 6.1	6.5	0.5	3.0	6800	02ZZ01R0401
M5	6.9	11.50	0.5 - 2.0	7.0 - 7.1	7.5	0.5	6.0	10000	02ZZ01R0501
M6	8.9	14.00	0.5 - 2.5	9.0 - 9.1	9.5	0.5	10.0	15000	02ZZ01R0601
M8	10.9	15.50	0.5 - 3.0	11.0 - 11.1	11.5	0.6	24.0	27000	02ZZ01R0801
M10	12.9	19.50	1.0 - 3.5	13.0 - 13.1	13.5	0.7	48.0	37000	02ZZ01R1001





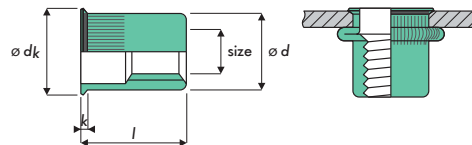

Body

Aluminium
Reduced countersunk head
Open end



Larger
grip range
on request

size	$\varnothing d$	l	 min-max	 \varnothing	$\varnothing d_k$	k min	 [Nm]	 [N]	code
	mm	mm	mm	mm	mm	mm			
M4	5.9	10.00	0.5 - 2.5	6.0 - 6.1	6.5	0.5	2.5	4000	02AL01R0401
M5	6.9	11.50	0.5 - 3.0	7.0 - 7.1	7.5	0.5	5.0	6500	02AL01R0501
M6	8.9	14.00	0.5 - 3.0	9.0 - 9.1	9.5	0.5	8.0	7000	02AL01R0601
M8	10.9	15.50	0.5 - 3.0	11.0 - 11.1	11.5	0.6	20.0	12000	02AL01R0801
M10	12.9	19.50	1.0 - 3.5	13.0 - 13.1	13.5	0.7	25.0	17000	02AL01R1001