


## Q-Standard





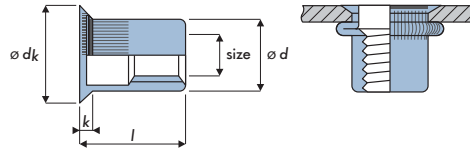

Body

**Steel Zinc plated**  
Countersunk head  
Open end




Larger  
grip range  
on request

size	$\varnothing d$	$l$	 min-max	 Ø	$\varnothing d_k$	$k$ min			code
	mm	mm	mm	mm	mm	mm	[Nm]	[N]	
M4	5.9	11.50	1.5 - 3.5	6.0 - 6.1	8.5	1.5	3.0	6800	02ST01C0401
M5	6.9	13.50	1.5 - 4.0	7.0 - 7.1	9.5	1.5	6.0	10000	02ST01C0501
M6	8.9	16.00	1.5 - 4.5	9.0 - 9.1	11.5	1.5	10.0	15000	02ST01C0601
M8	10.9	19.00	1.5 - 4.5	11.0 - 11.1	13.5	1.5	24.0	27000	02ST01C0801
M10	12.9	21.00	1.5 - 4.5	13.0 - 13.1	16.0	1.5	48.0	37000	02ST01C1001





Body

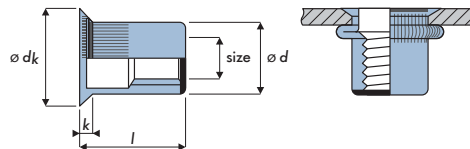**Steel Zinc plated**  
Countersunk head  
Closed end



Larger  
grip range  
on request

size	$\varnothing d$	$l$	 min-max	 Ø	$\varnothing d_k$	$k$ min			code
	mm	mm	mm	mm	mm	mm	[Nm]	[N]	
M4	5.9	17.50	1.5 - 3.5	6.0 - 6.1	9.0	1.5	3.0	6800	02ST02C0401
M5	6.9	20.50	1.5 - 4.0	7.0 - 7.1	9.5	1.5	6.0	10000	02ST02C0501
M6	8.9	23.50	1.5 - 4.5	9.0 - 9.1	11.5	1.5	10.0	15000	02ST02C0601
M8	10.9	28.00	1.5 - 4.5	11.0 - 11.1	13.5	1.5	24.0	27000	02ST02C0801
M10	12.9	36.00	1.5 - 4.5	13.0 - 13.1	16.0	1.5	48.0	37000	02ST02C1001