


Q-Standard



Body

Steel Zinc plated
Reduced countersunk head
Open end

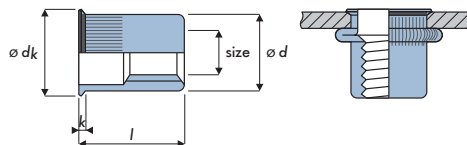


Larger grip range on request

size	$\varnothing d$	l	min-max	\varnothing	$\varnothing d_k$	k min	[Nm]	[N]	code
	mm	mm	mm	mm	mm	mm			
M3	4.9	9.00	0.5 - 2.0	5.0 - 5.1	6.0	0.5	1.0	4900	02ST01R0301
M4	5.9	10.00	0.5 - 2.5	6.0 - 6.1	6.5	0.5	3.0	6800	02ST01R0401
M4	5.9	13.00	3.0 - 4.0	6.0 - 6.1	6.5	0.5	3.0	6800	02ST01R0402
M5	6.9	11.50	0.5 - 3.0	7.0 - 7.1	7.5	0.5	6.0	10000	02ST01R0501
M5	6.9	13.00	2.0 - 4.0	7.0 - 7.1	7.5	0.5	6.0	10000	02ST01R0502
M6	8.9	14.00	0.5 - 3.0	9.0 - 9.1	9.5	0.5	10.0	15000	02ST01R0601
M6	8.9	17.50	3.0 - 5.0	9.0 - 9.1	9.5	0.5	10.0	15000	02ST01R0602
M8	10.9	15.50	0.5 - 3.0	11.0 - 11.1	11.5	0.5	24.0	27000	02ST01R0801
M8	10.9	19.50	3.0 - 6.0	11.0 - 11.1	11.5	0.5	24.0	27000	02ST01R0802
M10	12.9	19.50	1.0 - 3.5	13.0 - 13.1	13.5	0.7	48.0	37000	02ST01R1001
M10	12.9	22.00	3.5 - 6.0	13.0 - 13.1	13.5	0.7	48.0	37000	02ST01R1002
M12	15.9	24.00	1.5 - 4.0	16.0 - 16.1	17.5	0.75	82.0	54000	02ST01R1201
M12	15.9	27.50	4.5 - 7.5	16.0 - 16.1	17.5	0.75	82.0	54000	02ST01R1202



Body

Steel Zinc plated
Reduced countersunk head
Closed end

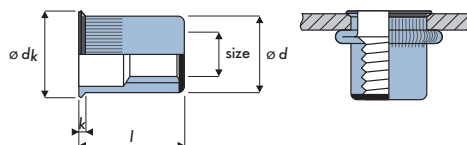

Larger grip range on request

size	$\varnothing d$	l	min-max	\varnothing	$\varnothing d_k$	k min	[Nm]	[N]	code
	mm	mm	mm	mm	mm	mm			
M4	5.9	16.00	0.5 - 3.0	6.0 - 6.1	6.5	0.5	3.0	6800	02ST02R0401
M5	6.9	19.00	0.5 - 3.0	7.0 - 7.1	7.5	0.5	6.0	10000	02ST02R0501
M6	8.9	22.50	0.5 - 3.0	9.0 - 9.1	9.5	0.5	10.0	15000	02ST02R0601
M8	10.9	25.50	0.5 - 3.0	11.0 - 11.1	11.5	0.5	24.0	27000	02ST02R0801
M10	12.9	35.00	1.0 - 3.5	13.0 - 13.1	13.5	0.7	48.0	37000	02ST02R1001