


Q-Full Hexagon




Body

Steel Zinc plated
Reduced countersunk head
Open end

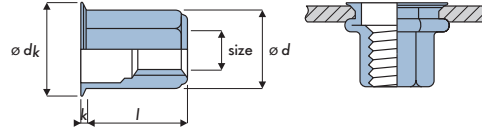


Larger grip range on request

size	$\varnothing d$	l	 min-max	 sw	$\varnothing d_k$	k min			code
	mm	mm	mm	mm	mm	mm	[Nm]	[N]	
M4	5.9	12.00	0.5 - 3.0	6.0 - 6.1	7.0	0.5	3.0	6800	02ST05R0401
M5	6.9	13.50	0.5 - 3.0	7.0 - 7.1	8.0	0.5	6.0	10000	02ST05R0501
M6	8.9	16.00	0.5 - 3.0	9.0 - 9.1	10.0	0.6	10.0	15000	02ST05R0601
M8	10.9	18.00	0.5 - 3.0	11.0 - 11.1	12.0	0.7	24.0	27000	02ST05R0801
M10	12.9	22.00	1.0 - 4.0	13.0 - 13.1	14.5	0.8	48.0	37000	02ST05R1001
M12	15.9	25.00	1.5 - 5.0	16.0 - 16.1	18.0	0.9	82.0	54000	02ST05R1201



Body

Stainless Steel A2
Reduced countersunk head
Open end

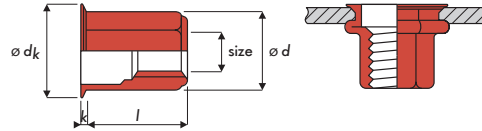

Larger grip range on request

size	$\varnothing d$	l	 min-max	 sw	$\varnothing d_k$	k min			code
	mm	mm	mm	mm	mm	mm	[Nm]	[N]	
M4	5.9	12.00	0.5 - 3.0	6.0 - 6.1	7.0	0.5	3.0	6800	02SS05R0401
M5	6.9	13.50	0.5 - 3.0	7.0 - 7.1	8.0	0.5	6.0	10000	02SS05R0501
M6	8.9	16.00	0.5 - 3.0	9.0 - 9.1	10.0	0.6	10.0	15000	02SS05R0601
M8	10.9	18.00	0.5 - 3.0	11.0 - 11.1	12.0	0.7	24.0	27000	02SS05R0801
M10	12.9	22.00	1.0 - 4.0	13.0 - 13.1	14.5	0.8	48.0	37000	02SS05R1001