



Body: Aluminium *

Stem: Steel **

Countersunk head

Hülse: Aluminium *

Dorn: Stahl **


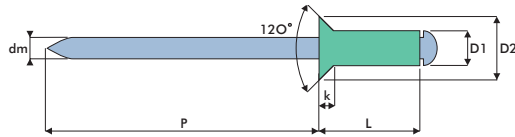
Senkkopf

Cuerpo: Aluminio *





Vástago: Acero **

Remache avellanada

*Ø2.4 - 3.2 = 5052 Ø4.0 - 6.4 = 5154 **Ø2.4 - 3.2 = DC01 Ø4.0 - 6.4 = C45



DIN EN ISO 15978

D1	L	 min - max	 Ø	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
2.4	6.0	2.0 - 4.0	2.5	5.0	0.8	1.37	26	550	350	10AS42406
	8.0	4.0 - 6.0								10AS42408
	10.0	6.0 - 8.0								10AS42410
3.0	6.0	2.0 - 3.5	3.1	6.0	1.0	1.70	26	850	550	10AS43006
	8.0	3.5 - 5.0								10AS43008
	10.0	5.0 - 7.0								10AS43010
	12.0	7.0 - 9.0								10AS43012
	14.0	9.0 - 11.0								10AS43014
3.2	6.0	1.5 - 3.5	3.3	6.0	1.0	1.75	26	1100	750	10AS43206
	8.0	3.5 - 5.0								10AS43208
	10.0	5.0 - 7.0								10AS43210
	12.0	7.0 - 9.0								10AS43212
	14.0	9.0 - 11.0								10AS43214
	16.0	9.0 - 13.0								10AS43216
4.0	6.0	1.5 - 2.0	4.1	7.5	1.3	2.15	27	1800	1250	10AS44006
	8.0	2.0 - 5.0								10AS44008
	10.0	5.0 - 6.5								10AS44010
	12.0	6.5 - 8.5								10AS44012
	14.0	8.0 - 10.5								10AS44014
	16.0	8.5 - 12.5								10AS44016
	18.0	10.5 - 14.0								10AS44018
	20.0	12.5 - 16.5								10AS44020


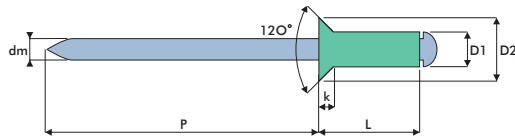
Q-STANDARD







Body: **Aluminium 5154**
 Stem: **Steel C45**
 Countersunk head

Hülse: **Aluminium 5154**
 Dorn: **Stahl C45**
 Senkkopf

Cuerpo: **Aluminio 5154**
 Vástago: **Acero C45**
 Remache avellanada



DIN EN ISO 15978

D1	L	 min - max	 Ø	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
4.8	6.0	1.5 - 2.5	4.9	9.0	1.5	2.63	28	2600	1850	10AS44806
	8.0	2.5 - 4.0								10AS44808
	10.0	4.0 - 6.0								10AS44810
	12.0	6.0 - 8.0								10AS44812
	14.0	7.0 - 10.0								10AS44814
	16.0	8.0 - 12.0								10AS44816
	18.0	9.0 - 13.0								10AS44818
	21.0	13.0 - 16.0								10AS44821
	22.0	15.0 - 17.0								10AS44822
	25.0	15.0 - 20.0								10AS44825
	30.0	20.0 - 25.0								10AS44830
35.0	25.0 - 30.0								10AS44835	
5.0	8.0	2.5 - 4.0	5.1	9.0	1.5	2.63	28	3100	2150	10AS45008
	10.0	4.0 - 6.0								10AS45010
	12.0	6.0 - 8.0								10AS45012
	14.0	7.0 - 9.0								10AS45014
	16.0	8.0 - 12.0								10AS45016
	18.0	9.0 - 13.0								10AS45018
	20.0	12.0 - 15.0								10AS45020
	25.0	15.0 - 20.0								10AS45025
30.0	20.0 - 25.0								10AS45030	