



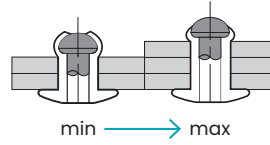

Body **Aluminium**
Stem **Stainless Steel A2**
Large head


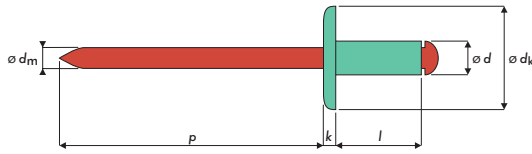


SIMILAR TO
DIN EN ISO 15977

$\varnothing d$	l	min - max	\varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	[N]	[N]	code
5.0	8.0	2.5 - 4.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25008
	10.0	4.0 - 6.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25010
	12.0	6.0 - 8.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25012
	14.0	7.0 - 9.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25014
	16.0	8.0 - 12.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25016
	18.0	11.0 - 13.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25018
	20.0	13.0 - 15.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25020
	25.0	15.0 - 20.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25025
	30.0	20.0 - 25.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AX25030



Body **Aluminium**
Stem **Stainless Steel A2**
Extra large head

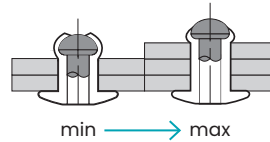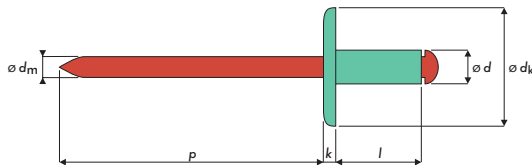

SIMILAR TO
DIN EN ISO 15977

$\varnothing d$	l	min - max	\varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	[N]	[N]	code
5.0	8.0	2.5 - 4.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35008
	10.0	4.0 - 6.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35010
	12.0	6.0 - 8.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35012
	14.0	7.0 - 9.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35014
	16.0	8.0 - 12.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35016
	18.0	11.0 - 13.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35018
	20.0	13.0 - 15.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35020
	25.0	15.0 - 20.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35025
	30.0	20.0 - 25.0	5.1 - 5.2	16.0	2.5	2.95	27	2950	1950	10AX35030