


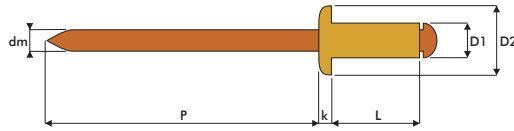
Q-STANDARD







Body: **Copper Alloy**
 Stem: **Bronze Alloy**
 Dome head

Hülse: **Kupfer Legierung**
 Dorn: **Bronze Legierung**
 Flachrundkopf

Cuerpo: **Cobre Aleación**
 Vástago: **Bronce Aleación**
 Remache alomada



DIN EN ISO 16582

D1	L	 min - max	 Ø	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.0	6.0	2.0 - 3.0	3.1	6.3	1.0	1.70	26	950	760	10CB13006
	8.0	3.0 - 5.0								10CB13008
	10.0	5.0 - 7.0								10CB13010
	12.0	7.0 - 9.0								10CB13012
3.2	5.0	0.5 - 2.0	3.3	6.3	1.0	1.75	26	1000	800	10CB13205
	6.0	2.0 - 3.0								10CB13206
	7.0	3.0 - 4.0								10CB13207
	8.0	3.0 - 5.0								10CB13208
	10.0	5.0 - 7.0								10CB13210
	12.0	7.0 - 9.0								10CB13212
4.0	6.0	1.0 - 3.0	4.1	8.0	1.3	2.15	27	1800	1500	10CB14006
	8.0	3.0 - 5.0								10CB14008
	10.0	5.0 - 7.0								10CB14010
	12.0	7.0 - 9.0								10CB14012
	14.0	9.0 - 10.0								10CB14014
	16.0	10.0 - 12.5								10CB14016
4.8	8.0	2.5 - 4.0	4.9	9.5	1.4	2.63	28	2500	2300	10CB14808
	10.0	4.0 - 6.0								10CB14810
	12.0	6.0 - 8.0								10CB14812
	14.0	8.0 - 10.0								10CB14814
	16.0	10.0 - 12.0								10CB14816