







## Q-Standard

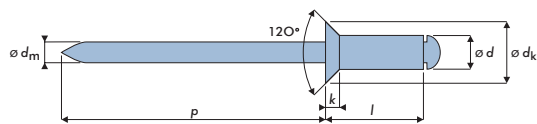

Body **Steel Zinc plated**  
 Stem **Steel Zinc plated**  
 Countersunk head



DIN EN ISO 15980

$\varnothing d$	$l$	 min - max	 $\varnothing$	$\varnothing d_k$	$k$ max.	$\varnothing d_m$ max.	$p$ min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.0	6.0	1.5 - 3.0	3.1 - 3.2	6.0	1.3	2.15	25	1100	950	10SS43006
	8.0	3.0 - 5.0	3.1 - 3.2	6.0	1.3	2.15	25	1100	950	10SS43008
	10.0	5.0 - 6.5	3.1 - 3.2	6.0	1.3	2.15	25	1100	950	10SS43010
	12.0	6.5 - 8.0	3.1 - 3.2	6.0	1.3	2.15	25	1100	950	10SS43012
3.2	6.0	1.5 - 3.0	3.3 - 3.4	6.0	1.3	2.15	25	1200	1100	10SS43206
	8.0	3.0 - 5.0	3.3 - 3.4	6.0	1.3	2.15	25	1200	1100	10SS43208
	10.0	5.0 - 6.5	3.3 - 3.4	6.0	1.3	2.15	25	1200	1100	10SS43210
	12.0	6.5 - 8.0	3.3 - 3.4	6.0	1.3	2.15	25	1200	1100	10SS43212
	14.0	8.0 - 10.0	3.3 - 3.4	6.0	1.3	2.15	25	1200	1100	10SS43214
4.0	6.0	2.0 - 3.0	4.1 - 4.2	7.5	1.7	2.80	27	2000	1700	10SS44006
	8.0	3.0 - 5.0	4.1 - 4.2	7.5	1.7	2.80	27	2000	1700	10SS44008
	10.0	5.0 - 6.5	4.1 - 4.2	7.5	1.7	2.80	27	2000	1700	10SS44010
	12.0	6.5 - 8.0	4.1 - 4.2	7.5	1.7	2.80	27	2000	1700	10SS44012
	14.0	8.0 - 10.0	4.1 - 4.2	7.5	1.7	2.80	27	2000	1700	10SS44014
	16.0	8.0 - 12.0	4.1 - 4.2	7.5	1.7	2.80	27	2000	1700	10SS44016
4.8	8.0	2.5 - 4.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44808
	10.0	4.0 - 6.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44810
	12.0	6.0 - 8.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44812
	14.0	7.0 - 9.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44814
	16.0	8.0 - 11.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44816
	18.0	11.0 - 13.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44818
	20.0	11.0 - 15.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44820
	22.0	14.0 - 17.0	4.9 - 5.0	9.0	2.0	3.50	27	3100	2900	10SS44822