



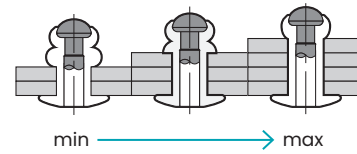

Body **Aluminium**
 Stem **Stainless Steel A2**
 Dome head

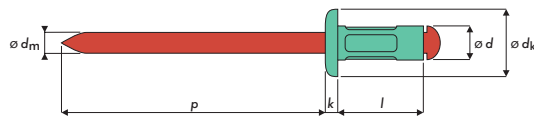

$\varnothing d$	l	min - max	\varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	[N]	[N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.0	8.0	0.8 - 4.3	3.1 - 3.2	6.0	1.3	2.00	27	810	620	15AX13008
	9.5	2.0 - 6.5	3.1 - 3.2	6.0	1.3	2.00	27	810	620	15AX13009
	12.5	5.0 - 9.5	3.1 - 3.2	6.0	1.3	2.00	27	810	620	15AX13012
3.2	8.0	0.8 - 4.8	3.3 - 3.4	6.0	1.3	2.00	27	980	760	15AX13208
	9.5	1.2 - 6.4	3.3 - 3.4	6.0	1.3	2.00	27	980	760	15AX13209
	11.0	4.0 - 7.9	3.3 - 3.4	6.0	1.3	2.00	27	980	760	15AX13211
	12.7	5.5 - 8.5	3.3 - 3.4	6.0	1.3	2.00	27	980	760	15AX13212
4.0	9.5	1.2 - 6.4	4.1 - 4.2	8.0	1.7	2.50	27	1600	1200	15AX14009
	12.7	4.0 - 8.0	4.1 - 4.2	8.0	1.7	2.50	27	1600	1200	15AX14012
	17.0	6.4 - 12.7	4.1 - 4.2	8.0	1.7	2.50	27	1600	1200	15AX14017
4.8	11.0	1.0 - 6.4	4.9 - 5.0	9.5	2.0	3.00	27	2350	1690	15AX14810
	12.0	4.0 - 8.0	4.9 - 5.0	9.5	2.0	3.00	27	2350	1690	15AX14812
	15.0	4.8 - 11.0	4.9 - 5.0	9.5	2.0	3.00	27	2350	1690	15AX14815
	17.0	6.4 - 12.7	4.9 - 5.0	9.5	2.0	3.00	27	2350	1690	15AX14817
	20.0	10.0 - 16.0	4.9 - 5.0	9.5	2.0	3.00	27	2350	1690	15AX14820
	24.8	12.7 - 19.8	4.9 - 5.0	9.5	2.0	3.00	27	2350	1690	15AX14824