







Body **Aluminium**
Stem **Stainless Steel A2**
Extra large head

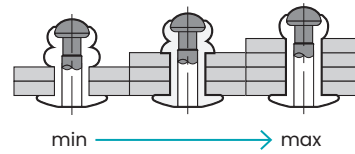

$\varnothing d$	l	min - max	\varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	[N]	[N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
4.8	11.0	1.6 - 6.4	4.9 - 5.0	16.0	2.5	3.00	27	2350	1690	15AX34810
	12.0	4.0 - 8.0	4.9 - 5.0	16.0	2.5	3.00	27	2350	1690	15AX34812
	15.0	4.8 - 11.0	4.9 - 5.0	16.0	2.5	3.00	27	2350	1690	15AX34815
	17.0	6.4 - 12.7	4.9 - 5.0	16.0	2.5	3.00	27	2350	1690	15AX34817
	20.0	10.0 - 16.0	4.9 - 5.0	16.0	2.5	3.00	27	2350	1690	15AX34820
	24.8	12.7 - 19.5	4.9 - 5.0	16.0	2.5	3.00	27	2350	1690	15AX34824

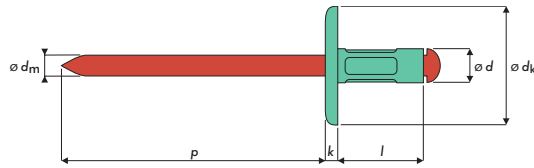

Body **Aluminium**
Stem **Stainless Steel A2**
Countersunk head

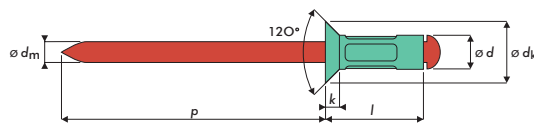

$\varnothing d$	l	min - max	\varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	[N]	[N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	8.0	1.5 - 5.0	3.3 - 3.4	6.0	1.3	2.00	27	980	760	15AX43208
	9.5	2.4 - 6.3	3.3 - 3.4	6.0	1.3	2.00	27	980	760	15AX43209
	12.5	4.0 - 8.5	3.3 - 3.4	6.0	1.3	2.00	27	980	760	15AX43212
4.0	9.5	2.8 - 6.0	4.1 - 4.2	7.5	1.7	2.50	27	1600	1200	15AX44009
	11.0	3.0 - 7.0	4.1 - 4.2	7.5	1.7	2.50	27	1600	1200	15AX44011
	12.5	4.0 - 8.0	4.1 - 4.2	7.5	1.7	2.50	27	1600	1200	15AX44012
	17.0	6.4 - 12.7	4.1 - 4.2	7.5	1.7	2.50	27	1600	1200	15AX44017
4.8	10.0	1.6 - 5.0	4.9 - 5.0	9.0	2.0	3.00	27	2350	1690	15AX44810
	12.0	3.2 - 7.9	4.9 - 5.0	9.0	2.0	3.00	27	2350	1690	15AX44812
	15.0	6.0 - 11.0	4.9 - 5.0	9.0	2.0	3.00	27	2350	1690	15AX44815
	16.9	6.4 - 12.7	4.9 - 5.0	9.0	2.0	3.00	27	2350	1690	15AX44816
	20.0	10.0 - 15.0	4.9 - 5.0	9.0	2.0	3.00	27	2350	1690	15AX44820