

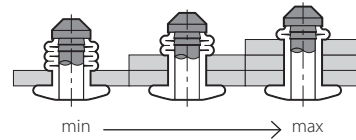
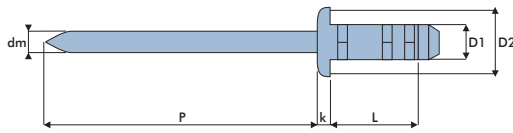
# BLISTER RANGE








Body: **Steel DD13**  
Stem: **Steel C45**  
Dome head

Hülse: **Stahl DD13**  
Dorn: **Stahl C45**  
Flachrundkopf

Cuerpo: **Acero DD13**  
Vástago: **Acero C45**  
Remache alomada



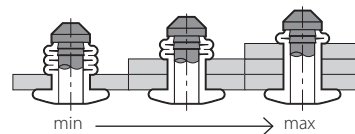
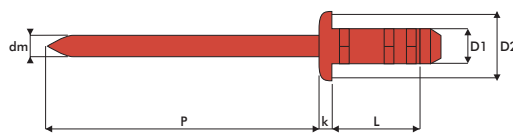
D1	L	 min - max	 Ø	D2	k	dm	p	 [N]	 [N]		code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]		
3.2	11.0	1.0 - 5.5	3.3 - 3.4	7.3	1.0	2.05	26	1200	900	100	15SS132112
	14.0	4.0 - 9.0								100	15SS132142
4.0	10.8	1.5 - 5.0	4.1 - 4.2	8.1	1.4	2.50	27	2090	1650	100	15SS140102
	15.0	5.5 - 8.5								75	15SS140152
4.8	12.7	1.0 - 7.5	4.9 - 5.0	9.6	1.5	3.10	28	2900	2600	75	15SS148122
	17.5	6.3 - 12.7								75	15SS148172








Body: **Stainless Steel A2 \*Cu**  
Stem: **Stainless Steel A2**  
Dome head

Hülse: **Edelstahl A2 \*Cu**  
Dorn: **Edelstahl A2**  
Flachrundkopf

Cuerpo: **Inox A2 \*Cu**  
Vástago: **Inox A2**  
Remache alomada



D1	L	 min - max	 Ø	D2	k	dm	p	 [N]	 [N]		code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]		
3.2	8.0	1.0 - 4.0	3.3 - 3.4	6.3	1.0	2.15	26	1900	1600	100	15XX132082
	12.0	4.0 - 8.0								100	15XX132122
4.0	10.0	1.5 - 5.0	4.1 - 4.2	8.0	1.3	2.8	27	3200	2400	100	15XX140102
	12.0	3.5 - 7.0								100	15XX140122
	15.0	6.0 - 9.5								75	15XX140152
4.8	10.0	1.5 - 5.0	4.9 - 5.0	9.6	1.6	3.18	28	4500	4100	75	15XX148102
	12.0	3.0 - 7.0								75	15XX148122
	15.0	6.5 - 10.0								75	15XX148152
	17.5	9.0 - 12.5								75	15XX148172