





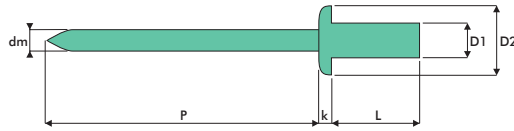


Body: **Aluminium 1050**
 Stem: **Aluminium EN AW-2007**
 Dome head

Hülse: **Aluminium 1050**
 Dorn: **Aluminium EN AW-2007**
 Flachrundkopf

Cuerpo: **Aluminio 1050**
 Vástago: **Aluminio EN AW-2007**
 Remache alomada



DIN EN ISO 15975

| D1 | L |  min - max |  Ø | D2 | k | dm | p |  [N] |  [N] | code |
|------|-------------|--|--|-----|-----|------|----|--|--|-----------|
| | mm | mm | mm | mm | mm | mm | mm | | | |
| 3.2 | 6.0 | 0.5 - 2.0 | 3.3 | 6.1 | 1.3 | 1.80 | 26 | 540 | 460 | 20AA13206 |
| | 8.0 | 2.0 - 3.5 | | | | | | | | 20AA13208 |
| | 9.5 | 3.5 - 5.0 | | | | | | | | 20AA13209 |
| | 10.0 | 5.0 - 6.5 | | | | | | | | 20AA13210 |
| | 12.5 | 6.5 - 8.0 | | | | | | | | 20AA13212 |
| 4.0 | 8.0 | 1.0 - 3.5 | 4.1 | 8.0 | 1.6 | 2.20 | 27 | 760 | 720 | 20AA14008 |
| | 9.5 | 3.5 - 4.5 | | | | | | | | 20AA14009 |
| | 11.0 | 4.5 - 6.5 | | | | | | | | 20AA14011 |
| | 12.5 | 6.5 - 8.5 | | | | | | | | 20AA14012 |
| | 15.0 | 8.5 - 10.5 | | | | | | | | 20AA14015 |
| 4.8 | 8.0 | 1.0 - 3.0 | 4.9 | 9.6 | 2.0 | 2.65 | 28 | 1400 | 1000 | 20AA14808 |
| | 9.5 | 3.0 - 4.5 | | | | | | | | 20AA14809 |
| | 11.5 | 4.5 - 6.5 | | | | | | | | 20AA14811 |
| | 12.5 | 6.0 - 7.5 | | | | | | | | 20AA14812 |
| | 14.5 | 7.5 - 9.0 | | | | | | | | 20AA14814 |
| | 16.0 | 9.0 - 11.0 | | | | | | | | 20AA14816 |
| | 18.0 | 11.0 - 13.0 | | | | | | | | 20AA14818 |
| | 21.0 | 13.0 - 16.0 | | | | | | | | 20AA14821 |
| 25.0 | 16.0 - 20.0 | | | | | | | | 20AA14825 | |