



Q-SEALED



Body: **Aluminium 5056**
 Stem: **Steel C35**
 Countersunk head

Hülse: **Aluminium 5056**
 Dorn: **Stahl C35**
 Senkkopf

Cuerpo: **Aluminio 5056**
 Vástago: **Acero C35**
 Remache avellanada

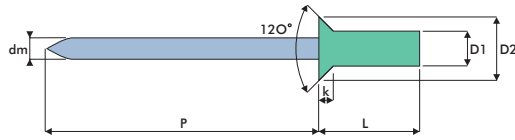

DIN EN ISO 15974

D1	L	 min - max	 Ø	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	7.5	1.5 - 3.5	3.3	5.9	1.6	1.75	26	1450	1100	20AS43207
	9.0	3.5 - 4.5								20AS43209
	10.5	4.5 - 6.5								20AS43210
	12.0	6.5 - 8.0								20AS43212
	13.5	8.0 - 9.5								20AS43213
4.0	9.5	2.0 - 5.0	4.1	8.0	2.0	2.15	27	2200	1600	20AS44009
	11.0	5.0 - 6.5								20AS44011
	12.5	6.5 - 8.0								20AS44012
	14.0	8.0 - 9.5								20AS44014
4.8	9.5	2.5 - 4.5	4.9	9.3	2.0	2.63	28	3100	2200	20AS44809
	11.0	4.5 - 6.0								20AS44811
	12.5	6.0 - 7.5								20AS44812
	14.0	7.5 - 9.0								20AS44814
	15.5	9.0 - 10.5								20AS44815
	17.0	10.5 - 12.0								20AS44817
	19.0	12.0 - 14.0								20AS44819