







## Q-Sealed

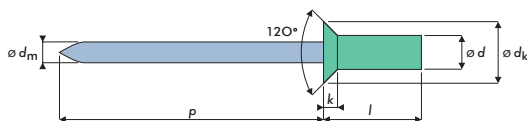

Body **Aluminium**  
Stem **Steel Phosphated**  
Countersunk head



DIN EN ISO 15974

$\varnothing d$	$l$	 min - max	 $\varnothing$	$\varnothing d_k$	$k$ max.	$\varnothing d_m$ max.	$p$ min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
<b>3.2</b>	<b>7.5</b>	1.5 - 3.5	3.3	6.0	1.3	1.85	25	1250	1070	<b>20AS43207</b>
	<b>9.0</b>	3.5 - 4.5	3.3	6.0	1.3	1.85	25	1250	1070	<b>20AS43209</b>
	<b>10.5</b>	4.5 - 6.5	3.3	6.0	1.3	1.85	25	1250	1070	<b>20AS43210</b>
	<b>12.0</b>	6.5 - 8.0	3.3	6.0	1.3	1.85	25	1250	1070	<b>20AS43212</b>
	<b>13.5</b>	8.0 - 9.5	3.3	6.0	1.3	1.85	25	1250	1070	<b>20AS43213</b>
<b>4.0</b>	<b>9.5</b>	2.0 - 5.0	4.1	7.5	1.7	2.35	25	2200	1600	<b>20AS44009</b>
	<b>11.0</b>	5.0 - 6.5	4.1	7.5	1.7	2.35	25	2200	1600	<b>20AS44011</b>
	<b>12.5</b>	6.0 - 8.0	4.1	7.5	1.7	2.35	25	2200	1600	<b>20AS44012</b>
	<b>14.0</b>	8.0 - 9.5	4.1	7.5	1.7	2.35	25	2200	1600	<b>20AS44014</b>
<b>4.8</b>	<b>9.5</b>	2.5 - 4.5	4.9	9.5	2.0	2.77	27	3100	2200	<b>20AS44809</b>
	<b>11.0</b>	4.5 - 6.0	4.9	9.5	2.0	2.77	27	3100	2200	<b>20AS44811</b>
	<b>12.5</b>	6.0 - 7.5	4.9	9.5	2.0	2.77	27	3100	2200	<b>20AS44812</b>
	<b>14.0</b>	7.5 - 9.0	4.9	9.5	2.0	2.77	27	3100	2200	<b>20AS44814</b>
	<b>15.5</b>	9.0 - 10.5	4.9	9.5	2.0	2.77	27	3100	2200	<b>20AS44815</b>
	<b>17.0</b>	10.5 - 12.0	4.9	9.5	2.0	2.77	27	3100	2200	<b>20AS44817</b>
	<b>19.0</b>	12.0 - 14.0	4.9	9.5	2.0	2.77	27	3100	2200	<b>20AS44819</b>