







## Q-Sealed

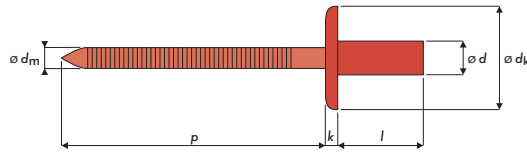

Body **Stainless Steel A2**  
 Stem **Stainless Steel C1**  
 Large head



Similar to DIN EN ISO 16585

$\varnothing d$	$l$	 min - max	 $\varnothing$	$\varnothing d_k$	$k$ max.	$\varnothing d_m$ max.	$p$ min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
<b>3.2</b>	<b>6.0</b>	0.5 - 1.5	3.3	<b>9.5</b>	1.3	1.90	25	2500	2000	<b>20XY23206</b>
	<b>8.0</b>	1.5 - 3.0	3.3	<b>9.5</b>	1.3	1.90	25	2500	2000	<b>20XY23208</b>
	<b>9.5</b>	3.0 - 5.0	3.3	<b>9.5</b>	1.3	1.90	25	2500	2000	<b>20XY23209</b>
	<b>12.0</b>	5.0 - 7.0	3.3	<b>9.5</b>	1.3	1.90	25	2500	2000	<b>20XY23212</b>
<b>4.0</b>	<b>6.0</b>	0.5 - 1.5	4.1	<b>12.0</b>	1.4	2.30	25	4000	3000	<b>20XY24006</b>
	<b>8.0</b>	1.5 - 3.0	4.1	<b>12.0</b>	1.4	2.30	25	4000	3000	<b>20XY24008</b>
	<b>10.0</b>	3.0 - 5.0	4.1	<b>12.0</b>	1.4	2.30	25	4000	3000	<b>20XY24010</b>
	<b>12.0</b>	5.0 - 6.5	4.1	<b>12.0</b>	1.4	2.30	25	4000	3000	<b>20XY24012</b>
	<b>15.0</b>	6.5 - 10.5	4.1	<b>12.0</b>	1.4	2.30	25	4000	3000	<b>20XY24015</b>
<b>4.8</b>	<b>8.0</b>	1.0 - 3.0	4.9	<b>14.0</b>	1.7	2.90	27	5500	4500	<b>20XY24808</b>
	<b>9.5</b>	3.0 - 4.5	4.9	<b>14.0</b>	1.7	2.90	27	5500	4500	<b>20XY24809</b>
	<b>12.0</b>	4.5 - 6.0	4.9	<b>14.0</b>	1.7	2.90	27	5500	4500	<b>20XY24812</b>
	<b>16.0</b>	6.0 - 10.5	4.9	<b>14.0</b>	1.7	2.90	27	5500	4500	<b>20XY24816</b>
	<b>20.0</b>	10.5 - 14.0	4.9	<b>14.0</b>	1.7	2.90	27	5500	4500	<b>20XY24820</b>