






Q-Standard



Niethülse **Aluminium**
 Nietdorn **Stahl verzinkt**
 Großkopf 9.5 | 12.0 | 14.0 mm

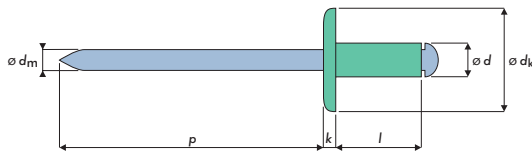



ÄHNLICH
 DIN EN ISO 15977

$\varnothing d$	l	 min - max	 \varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	 [N]	 [N]	Code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	6.0	1.5 - 3.5	3.3 - 3.4	9.5	2.0	2.00	25	700	500	10AS23206
	8.0	3.5 - 5.0	3.3 - 3.4	9.5	2.0	2.00	25	700	500	10AS23208
	10.0	5.0 - 7.0	3.3 - 3.4	9.5	2.0	2.00	25	700	500	10AS23210
	12.0	7.0 - 9.0	3.3 - 3.4	9.5	2.0	2.00	25	700	500	10AS23212
	14.0	9.0 - 11.0	3.3 - 3.4	9.5	2.0	2.00	25	700	500	10AS23214
4.0	6.0	1.0 - 3.0	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24006
	8.0	3.0 - 5.0	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24008
	10.0	5.0 - 6.5	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24010
	12.0	6.5 - 8.5	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24012
	14.0	8.5 - 10.5	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24014
	16.0	8.5 - 12.5	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24016
	18.0	12.5 - 14.5	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24018
	20.0	14.5 - 16.5	4.1 - 4.2	12.0	2.2	2.45	27	1700	1100	10AS24020
4.8	8.0	2.5 - 4.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24808
	10.0	4.0 - 6.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24810
	12.0	6.0 - 8.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24812
	14.0	7.0 - 9.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24814
	16.0	8.0 - 12.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24816
	18.0	11.0 - 13.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24818
	20.0	12.0 - 15.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24820
	22.0	14.0 - 17.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24822
	24.0	15.0 - 19.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24824
	25.0	15.0 - 20.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24825
	26.0	17.0 - 21.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24826
	28.0	18.0 - 23.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24828
	30.0	20.0 - 25.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24830
35.0	25.0 - 30.0	4.9 - 5.0	14.0	2.5	2.95	27	2500	1700	10AS24835	





Q-Standard

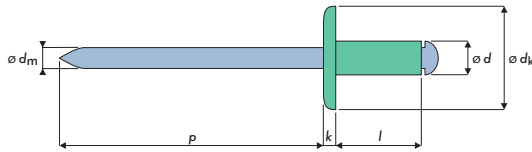

Niethülse **Aluminium**
 Nietdorn **Stahl verzinkt**
 Großkopf 9.5 | 12.0 | 14.0 mm



ÄHNLICH
 DIN EN ISO 15977

$\varnothing d$	l	 min - max	 \varnothing	$\varnothing d_k$	k max.	$\varnothing d_m$ max.	p min.	 [N]	 [N]	Code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
5.0	8.0	2.5 - 4.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25008
	10.0	4.0 - 6.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25010
	12.0	6.0 - 8.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25012
	14.0	7.0 - 9.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25014
	16.0	8.0 - 12.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25016
	18.0	11.0 - 13.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25018
	21.0	14.0 - 16.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25021
	24.0	15.0 - 19.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25024
	27.0	20.0 - 22.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25027
	30.0	22.0 - 25.0	5.1 - 5.2	14.0	2.5	2.95	27	2950	1950	10AS25030