







## Q-P-Power

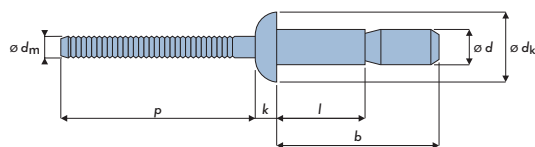



Niethülse **Stahl verzinkt**  
 Nietdorn **Stahl verzinkt**  
 Flachrundkopf







$\varnothing d$	$l$	$b$	 min - max	 Ø	$\varnothing d_k$	$k$	$\varnothing d_m$ max.	$p$ min.	 [N]	 [N]	Code
	mm	mm	mm	mm	mm	mm	mm	mm			
4.8	10.0	19.0	1.6 - 6.4	4.9 - 5.1	9.8	2.2	3.10	27	5340	6450	65SS14810
	14.0	25.0	1.6 - 11.1	4.9 - 5.1	9.8	2.2	3.10	27	5340	6450	65SS14814
6.4	14.0	26.0	2.0 - 9.5	6.6 - 6.9	12.9	3.2	4.10	27	9790	12200	65SS16414
	20.0	36.0	2.0 - 15.9	6.6 - 6.9	12.9	3.2	4.10	27	9790	12200	65SS16420
9.8	21.0	42.0	3.0 - 14.2	9.96 - 10.36	19.0	4.5	6.20	38	17790	26680	65SS19821

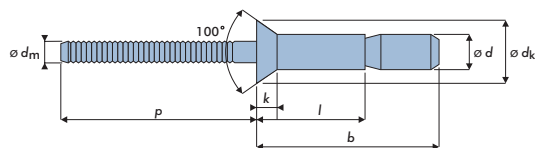

Niethülse **Stahl verzinkt**  
 Nietdorn **Stahl verzinkt**  
 Senkkopf



$\varnothing d$	$l$	$b$	 min - max	 Ø	$\varnothing d_k$	$k$	$\varnothing d_m$ max.	$p$ min.	 [N]	 [N]	Code
	mm	mm	mm	mm	mm	mm	mm	mm			
4.8	12.0	21.0	3.6 - 7.9	4.9 - 5.1	8.5	2.0	3.10	27	5300	6400	65SS44812
	16.0	27.0	3.6 - 12.7	4.9 - 5.1	8.5	2.0	3.10	27	5300	6400	65SS44816
6.4	16.5	29.0	5.0 - 11.1	6.7 - 6.9	10.3	2.0	4.10	27	9700	12330	65SS46416
	22.5	37.0	5.0 - 17.5	6.7 - 6.9	10.3	2.0	4.10	27	9700	12330	65SS46422