







Q-P-Power

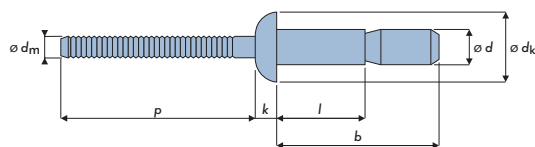



Niethülse **Stahl verzinkt**
 Nietdorn **Stahl verzinkt**
 Flachrundkopf







| $\varnothing d$ | l | b |  min - max |  Ø | $\varnothing d_k$ | k | $\varnothing d_m$ max. | p min. |  [N] |  [N] | Code |
|-----------------|------|------|--|--|-------------------|-----|---------------------------|-------------|--|--|-----------|
| | mm | mm | mm | mm | mm | mm | mm | mm | | | |
| 4.8 | 10.0 | 19.0 | 1.6 - 6.4 | 4.9 - 5.1 | 9.8 | 2.2 | 3.10 | 27 | 5340 | 6450 | 65SS14810 |
| | 14.0 | 25.0 | 1.6 - 11.1 | 4.9 - 5.1 | 9.8 | 2.2 | 3.10 | 27 | 5340 | 6450 | 65SS14814 |
| 6.4 | 14.0 | 26.0 | 2.0 - 9.5 | 6.6 - 6.9 | 12.9 | 3.2 | 4.10 | 27 | 9790 | 12200 | 65SS16414 |
| | 20.0 | 36.0 | 2.0 - 15.9 | 6.6 - 6.9 | 12.9 | 3.2 | 4.10 | 27 | 9790 | 12200 | 65SS16420 |
| 9.8 | 21.0 | 42.0 | 3.0 - 14.2 | 9.96 - 10.36 | 19.0 | 4.5 | 6.20 | 38 | 17790 | 26680 | 65SS19821 |

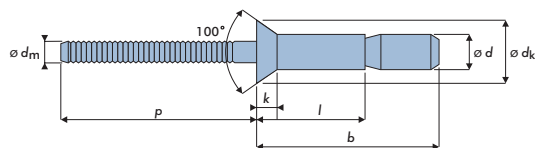

Niethülse **Stahl verzinkt**
 Nietdorn **Stahl verzinkt**
 Senkkopf



| $\varnothing d$ | l | b |  min - max |  Ø | $\varnothing d_k$ | k | $\varnothing d_m$ max. | p min. |  [N] |  [N] | Code |
|-----------------|------|------|--|--|-------------------|-----|---------------------------|-------------|--|--|-----------|
| | mm | mm | mm | mm | mm | mm | mm | mm | | | |
| 4.8 | 12.0 | 21.0 | 3.6 - 7.9 | 4.9 - 5.1 | 8.5 | 2.0 | 3.10 | 27 | 5300 | 6400 | 65SS44812 |
| | 16.0 | 27.0 | 3.6 - 12.7 | 4.9 - 5.1 | 8.5 | 2.0 | 3.10 | 27 | 5300 | 6400 | 65SS44816 |
| 6.4 | 16.5 | 29.0 | 5.0 - 11.1 | 6.7 - 6.9 | 10.3 | 2.0 | 4.10 | 27 | 9700 | 12330 | 65SS46416 |
| | 22.5 | 37.0 | 5.0 - 17.5 | 6.7 - 6.9 | 10.3 | 2.0 | 4.10 | 27 | 9700 | 12330 | 65SS46422 |